

Pin connectors 1.778mm

Single row

Solder tail

Series: PAA

PCB pin connectors

Solder tail with reduced pin spacing 1.778mm

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass CuZn 36pb3(36000)
Mating pin Ø:	0.45 mm
Mechanical life:	min 500 cycles
Rated current:	1 A
Contact resistance:	max 10 mΩ
Dielectric strength:	min 1000V _{RMS}




Ordering information

PAA - NNN1 - A P 1000A

No. of Positions

Pin Plating code

1	Tin150μ"
2	Tin200μ"
3	GF
4	Gold2μ"
5	Gold3μ"
6	Gold10μ"
7	Gold15μ"
S	Special

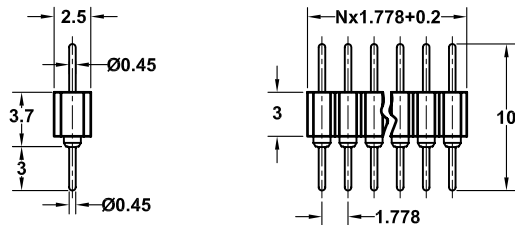

PAA-NNN1-APP1000A

Straight pin connector: single row,
grid spacing 1.778mm
Availability from: 2 to 32 contacts
Standard number of contacts 21 and
32