
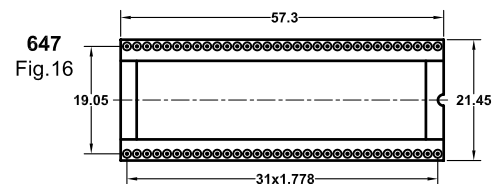
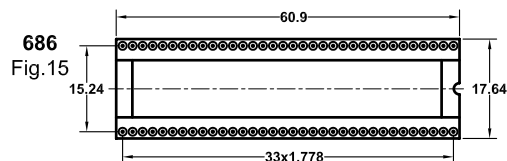
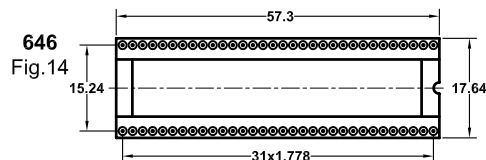
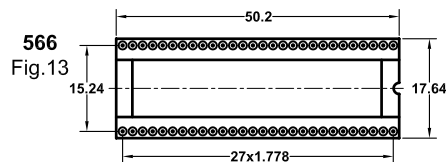
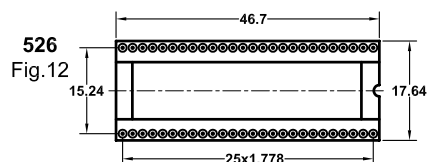
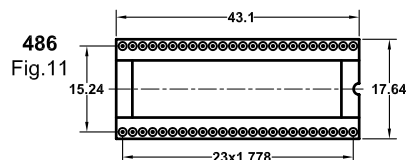
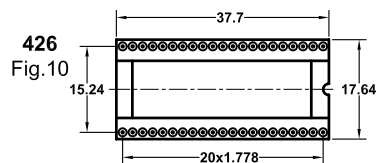
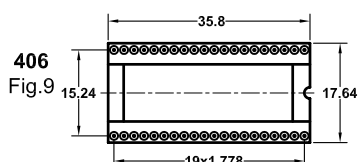



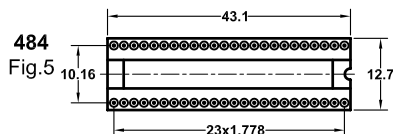





Dual-in-line pin headers 1.778mm

Insulator bodies Open frame

Solder tail



Ordering information

PAA - NNN X - A P 1000A

No. of Positions	Row spacing code	Pin Plating code
4	10.16mm	1 Tin150μ"
6	15.24mm	2 Tin200μ"
7	19.05mm	3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special