



Six finger clips

Technical Specs:

Material: Beryllium copper (C17200)
 Rated current: 3 A
 Contact resistance: max 4 mΩ

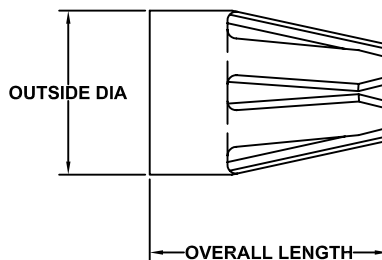

SIX CONTACT POINTS

PART NUMBER	OUTSIDE DIA	OVERALL LENGTH	SIZING PIN DIA	PROBE PIN DIA	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
NS-2	0.71	1.52		0.38	250GM	42GM
NS-3	0.79	1.52		0.38	60GM	15GM
NS-1AS	1.12	1.58		0.43	150GM	40GM
NS-1ASM	1.12	1.58		0.43	120GM	20GM
NS-1A	1.12	2.11		0.43	75GM	25GM
NS-1AL	1.12	2.11		0.45	42GM	15GM
NS-1ALX	1.12	2.11		0.45	20GM	10GM
NS-051	1.27	2.11		0.66	140GM	25GM
NS-052	1.32	2.11		0.66	375GM	100GM
NS-052L	1.32	2.11		0.66	125GM	40GM
NS-4	1.40	1.65		1.00	160GM	50GM
NS-5	1.73	2.16		1.00	300GM	75GM
NS-8	3.14	3.05		2.36	600GM	150GM