

0.5mm(0.02") FPC ZIF SMT R/A
Type Contact 04 to 60 Contacts

SPECIFICATIONS

MATERIAL:

HOUSING : THERMALPLASTIC , HEATPROOF

PLASTIC / UL 94V-0 ROHS

COVER : THERMALPLASTIC ,

PPS / UL 94V-0 ROHS

CONTACT : PHOSPHOR BRONZE ,

C5191R-SH , T=0.20mm


100~200m" TIN/LEAD(9:1) OVER

50~100m'' NICEL OVER ALL

FITTING NAIL : PHOSPHOR BRONZE , C5191R-SH , T=0.20mm

100~200m" TIN/LEAD(9:1) OVER

50~100m" NICEL OVER ALL

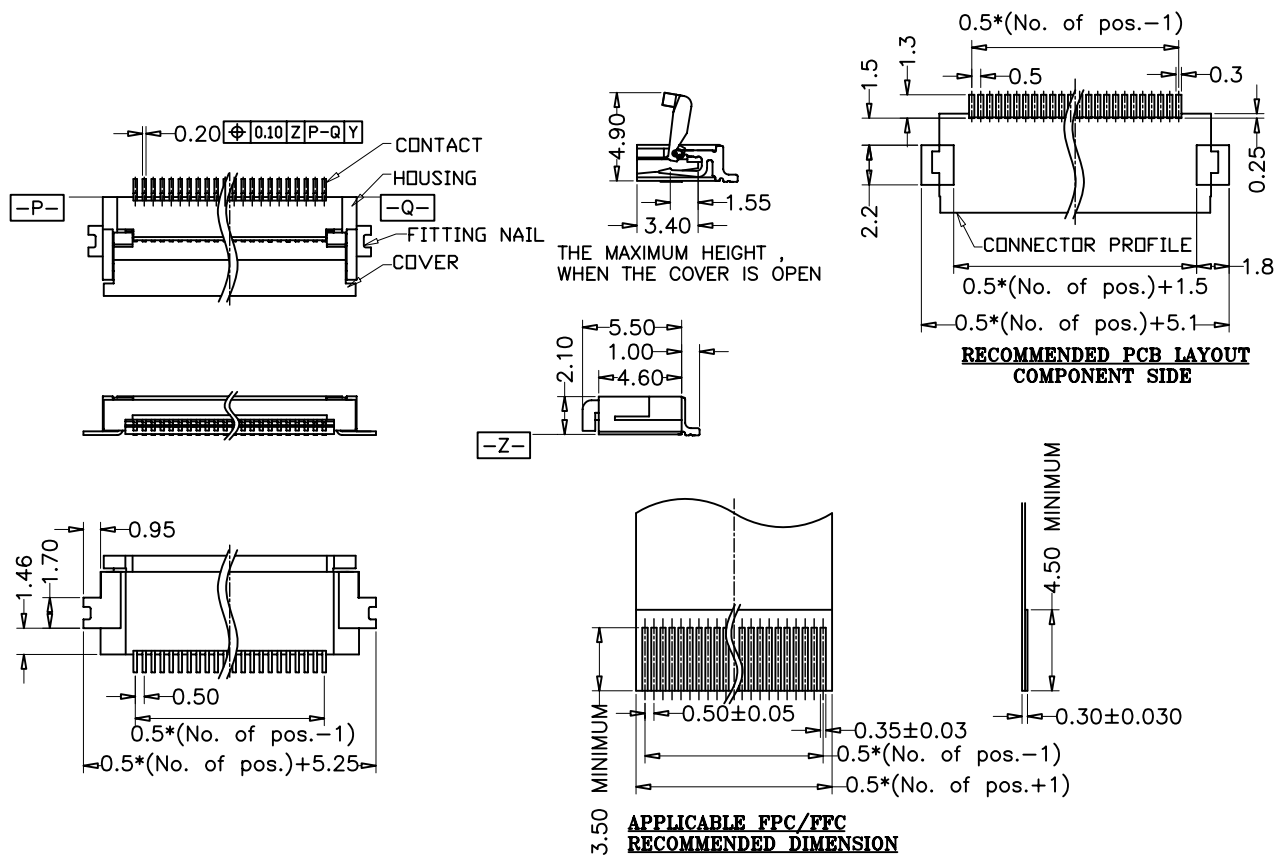

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

F	X	X	XX	X	X	--	XX
Pitch	Versions	Row Option	Pin NO	Contact Plating	Connector Type		Glide NO
A 0.30mm	A 180°	1 Single Row	02 to 50	01 Tin	A A Type		01-99
B 0.50mm	B 90°	2 Dual Row		02 Gold Flash	B B Type		
C 0.80mm	C SMT			03 Gold/Tin			
D 1.00mm							
E 1.25mm							