
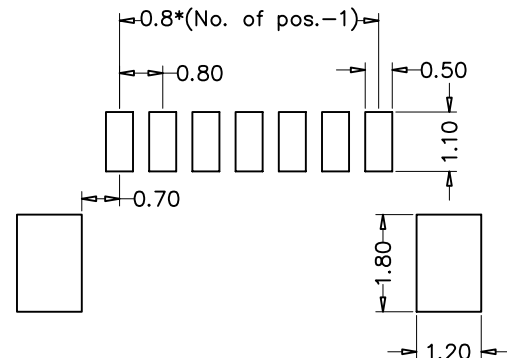
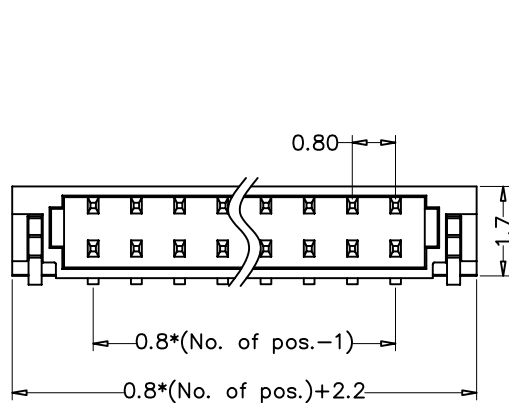




0.8mm(0.0315") Wafer Single Row SMT Straight Type 02 to 22 Contacts

SPECIFICATIONS

Current Rating:	1 Amp
Voltage Rating:	AC 50V
Insulator Resistance:	300 Megohms min.
Withstand Voltage:	AC 200V Min
Operating Temp.:	-25°C~+85°C
Contact Material:	Brass
Insulator Material:	NY-6T(UL94V-0) ROHS
Plated(*Standard):	Tin Plated

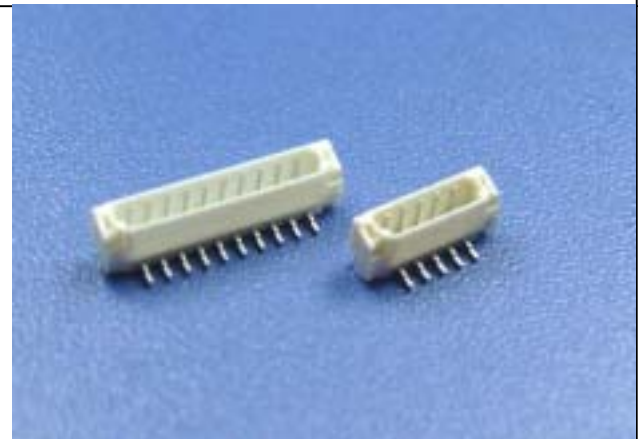

P.C.B Layout

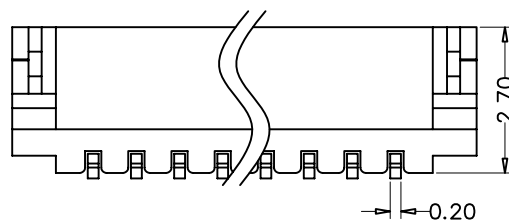

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

W	X	X	X	XX	--	X	XX	--	XX				
Pitch		Versions		Row Option		Pin NO		Connector Type		Contact Plating		Glide NO	
B	0.80mm	A	180°	1	Single Row	02 to 20	A: A Type	01	Tin	01-99			
C	1.00mm	B	90°	2	Dual Row		B: B Type	02	Gold Flash				
D	1.25mm	C	SMT					03	Gold/Tin				
F	2.00mm												
G	2.50mm												
H	2.54mm												
I	3.96mm												
K	5.08mm												