
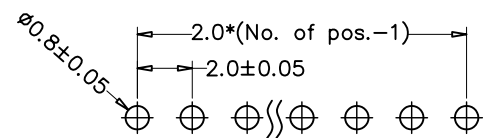
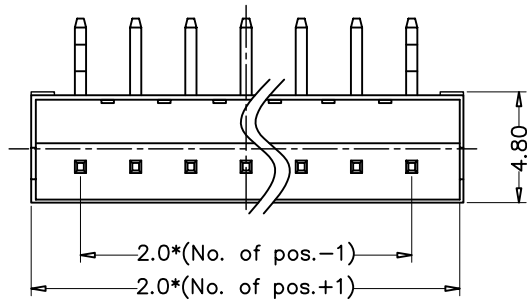




2.0mm(0.079") Wafer Single Row R/A 02 to 16 Contacts

SPECIFICATIONS

Current Rating:	3 Amp
Voltage Rating:	AC 100V
Insulator Resistance:	1000 Megohms min.
Withstand Voltage:	AC 800V min
Operating Temp. :	-40°C ~ +105°C
Insulator Material:	PA-66 (UL94V-0) ROHS
Contact Material:	Brass
Plated(*Standard):	Tin Plated

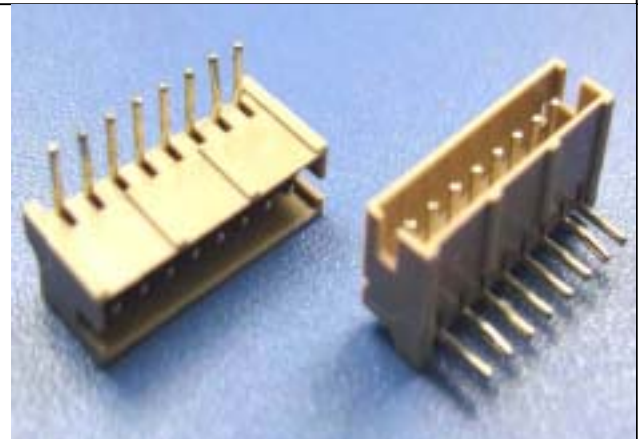

Recommended P.C.B Layout

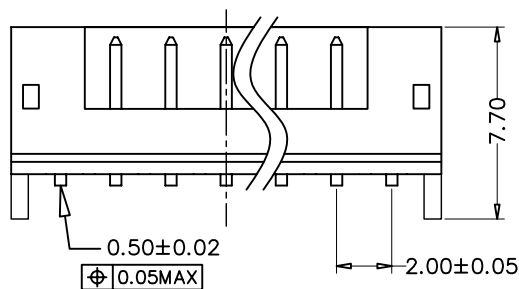

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

W	X	X	X	XX	--	X	XX	--	XX				
Pitch		Versions		Row Option		Pin NO		Connector Type		Contact Plating		Glide NO	
B	0.80mm	A	180°	1	Single Row	02	to 20	A:	A Type	01	Tin	01	99
C	1.00mm	B	90°	2	Dual Row			B:	B Type	02	Gold Flash		
D	1.25mm	C	SMT							03	Gold/Tin		
F	2.00mm												
G	2.50mm												
H	2.54mm												
I	3.96mm												
K	5.08mm												