
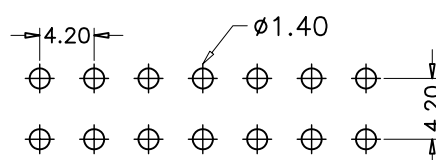




4.20mm(0.165") ATX Dual Row Straight

SPECIFICATIONS

Current Rating:	3 Amp
Voltage Rating:	AC 250V
Insulator Resistance:	1000 Megohms min.
Withstand Voltage:	AC 1000V min.
Operating Temp.:	-40° C ~ +105° C
Contact Material:	Brass
Insulator Material:	Nylon-66(UL94V-0) ROHS
Plated(*Standard):	Tin Plated

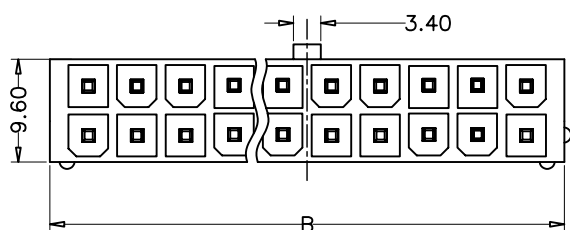

P. C. B LAYOUT

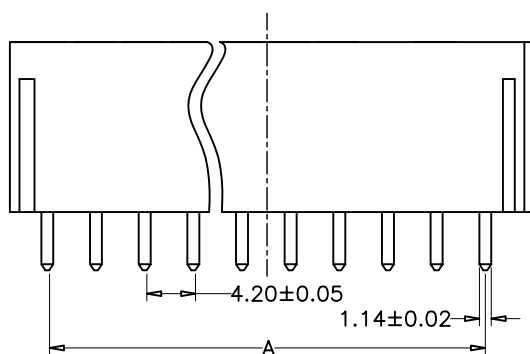

PART NO.	Dimension (mm)	
	A	B
2*1P		5.40
2*2P	4.20	9.60
2*3P	8.40	13.80
2*4P	12.60	18.00
2*5P	16.80	22.20
2*6P	21.00	26.40
2*7P	25.20	30.60
2*8P	29.40	34.80
2*9P	33.60	39.00
2*10P	37.80	43.50
2*11P	42.00	47.40
2*12P	46.20	51.60

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

ATX	X		X	XX	--	X	XX	--	XX
Connector Pitch			Pin NO			Housing Colour	Contact Plating		Glide NO
F 4.20mm			W Pole			01 Black	01 Tin		01-99
H 3.00mm			N No Pole			02 Blue	02 Gold Flash		
						03 Green	03 Gold/Tin		
						04 Yellow			