

D-SUB Female Right Angle Series

SPECIFICATIONS

1. Material:

Housing:LCP UL94V-0 ROHS
 Actuator:LCP UL94V-0 ROHS
 Terminal:Phosphor Bronze
 Stopper:Phosphor Bronze

2. Plating:



Terminal:Gold Plated
 Stopper:Tin Over Ni

3. Rating:



Operating Voltage:30V
 Current Rating:0.2A
 Operating Temperature:-25℃~+85℃



POS.	A	B	C	D	E	F
9P	16.35	25.00	30.80	16.55	15.05	18.80
15P	24.70	33.30	39.20	25.05	23.65	26.90
25P	38.40	47.05	53.05	38.75	37.10	40.40
37P	54.80	63.50	69.40	55.00	53.30	59.80

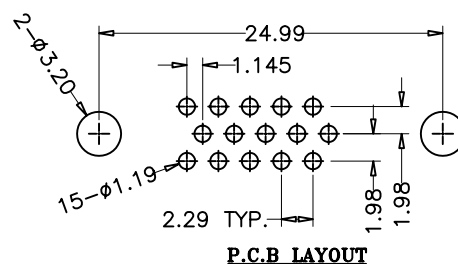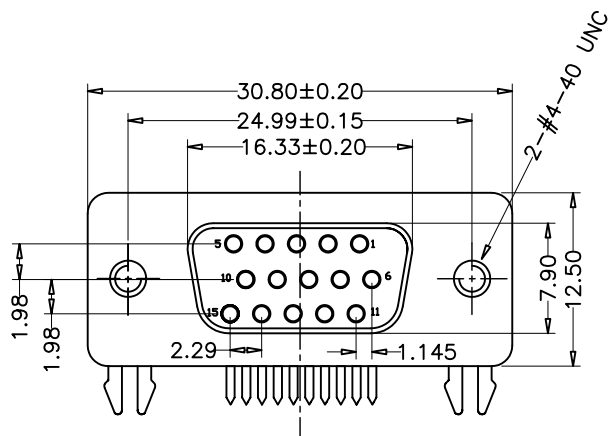

P.C.B LAYOUT

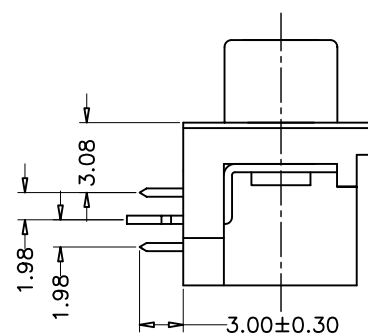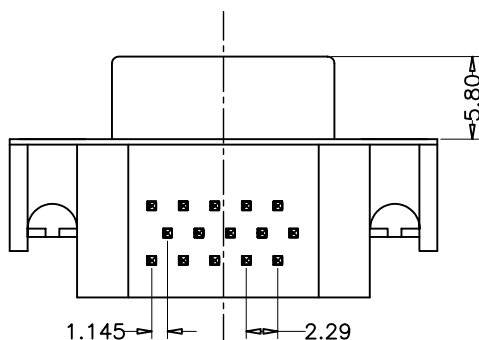

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

D X

Gender
 M Male/Plug
 F Female /Receptacle

X

Versions
 D DIP Type
 S Soldering

XX

Pin NO
 09 9Pin
 15 15Pin
 25 25Pin
 37 37Pin

--

X

Contact Plating
 1 Tin
 2 Gold Flash
 3 Gold/Tin
 4 Gold3µ"
 5 Gold5µ"
 6 Gold10µ"
 7 Gold30µ"

X

Shell Plating
 1 Gold
 2 Nickel
 3 Stainless Stell
 S Special

X

Housing Colour
 01 Block
 02 Blue
 03 Green
 04 Yellow

--

XX

Glide NO
 01-99