



D-SUB Male Dual Row Series See Table

SPECIFICATIONS

Current Rating: 5 Amp
 Insulator resistance: 1000Megohms min
 Operating Temperature: 55°C~105°C
 Contact resistance: 30mΩ MAX.
 Dielectric withstanding: AC 500V
 Insulator material: PBT+30%G.F UL94V-0 ROHS
 Contact material: Brass
 Contact plating: Selecting Plated
 Shell Material: Steel
 Shell Plated: Ni plated

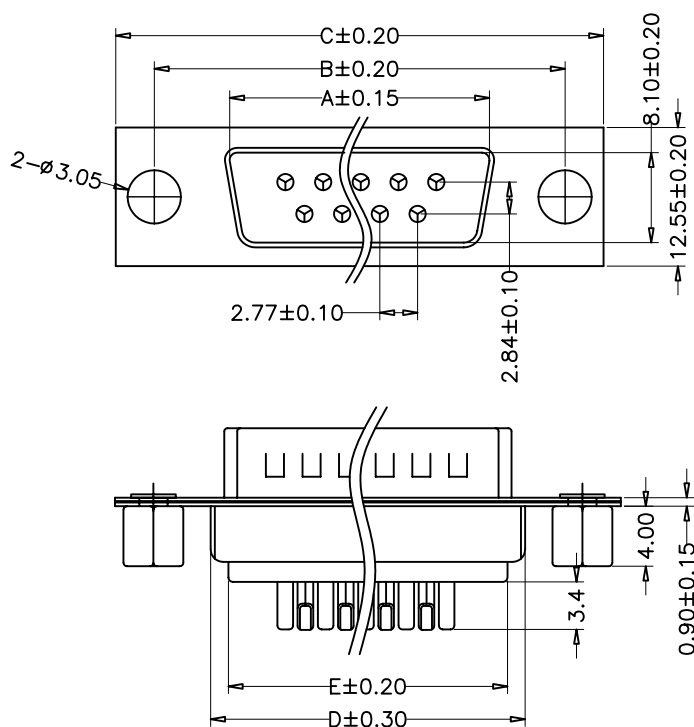

P.O.S.	A	B	C	D	E
9	17.77	24.99	30.90	19.20	15.65
15	25.25	33.32	39.14	27.65	24.60
25	38.38	47.04	53.04	41.10	38.00
37	55.42	63.50	69.32	57.44	54.50

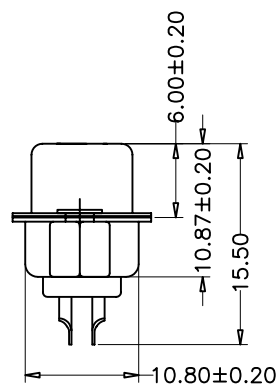

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

D	X	X	XX	--	X	X	X	--	XX
Gender	Versions	Pin NO	Contact Plating	Shell Plating	Housing Colour	Glide NO			
M Male/Plug F Female /Receptacle	D DIP Type S Soldering	09 9Pin 15 15Pin 25 25Pin 37 37Pin	1 Tin 2 Gold Flash 3 Gold/Tin 4 Gold3μ" 5 Gold5μ" 6 Gold10μ" 7 Gold30μ"	1 Gold 2 Nickel 3 Stainless Stell S Special	01 Block 02 Blue 03 Green 04 Yellow	01-99			