

Pitch:2.54*2.54mm(0.1"*0.1")

Female Header Dual Row S.M.T Type

FHD2XX Series

Technical Data

Material:

Contact material: Brass

Insulator material:Black polyester UL94V-0

Standard:PA6T+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at V=100V






Withstanding voltage:550V AC/minute

Mechanical:

Operating temperatures: Gold plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

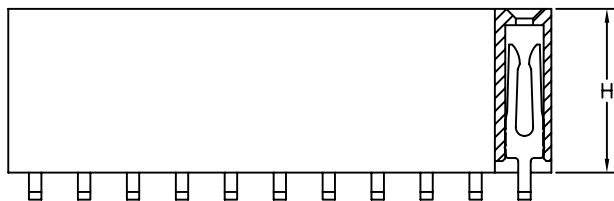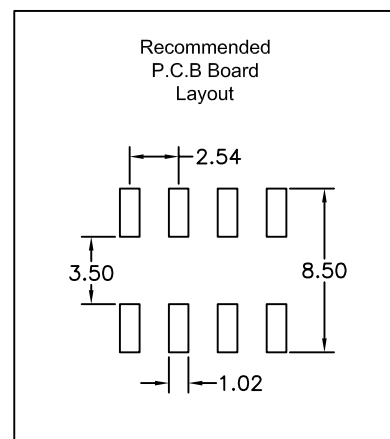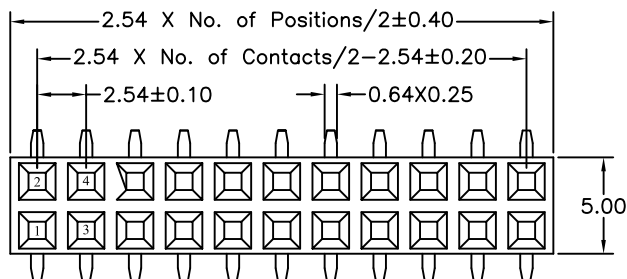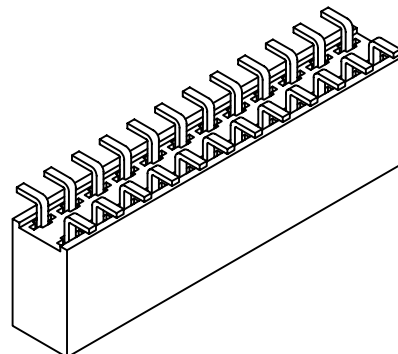

FHD2	XX	0 - Y	XX	X	X	XX
High Option	No. of Position	Plating Option	Insulator Material Option	Pin Length		
50 H=5.0mm	04 to 80	A G/F	A BK-PBT	01~99		
57 H=5.7mm		B Au3μ "	B BK-PA66			
85 H=8.5mm		C Au5μ "	C BK-PA6T			
		D Au10μ "	D BK-PA46			
		E Au15μ "	F BK-LCP			
		S Special	S Special			