

Pitch:1.27*2.54mm(0.05"*0.1")

Pin Header Dual Row Right Angle Dip Type

QEB225 Series

Technical Data

Material:

Contact material: Brass

Insulator material:Black polyester UL94V-0

Standard:PA46+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$





Withstanding voltage:300V AC/minute

Mechanical:


Operating temperatures: Gold plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +260° C,10s max.

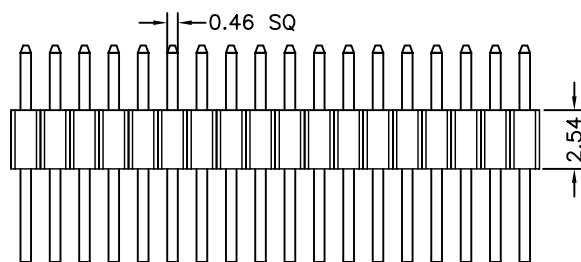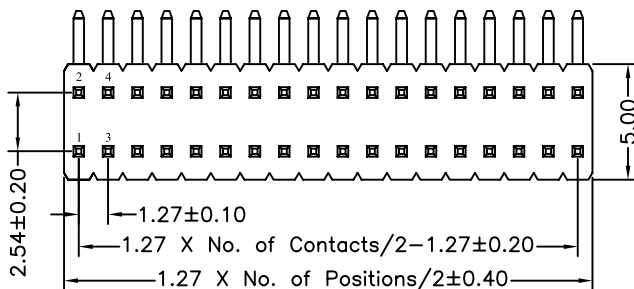

Recommended
P.C.B Board
Hole Layout



QEB2251

-Q

XX

X

X

A

XX

No. of Positions
04 to 100

Plating Option

A G/F
B Au3 μ "
C Au5 μ "
D Au10 μ "
E Au15 μ "
S Special

Insulator Material
Option

A BK-PBT
B BK-PA66
C BK-PA6T
D BK-PA46
F BK-LCP
S Special

Pin Length
(A/B/D)
01~99