

Pitch: 1.27*2.54mm (0.05" * 0.1")

Female Header Dual Row S.M.T Type

FED2XX Series

Technical Data

Material:

Contact material: Phosphor bronze

Insulator material: Black polyester UL94V-0

Standard: PA6T+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$






Withstanding voltage: 300V AC/minute

Mechanical:

Operating temperatures: Gold plated: -55°C to $+105^{\circ}\text{C}$

Tin plated: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+260^{\circ}\text{C}$, 10s max.

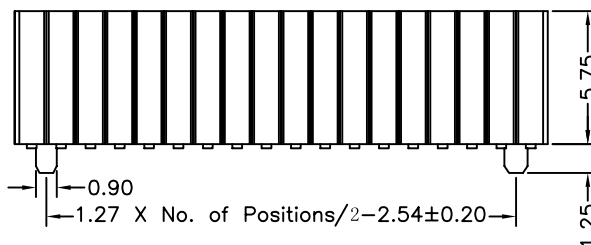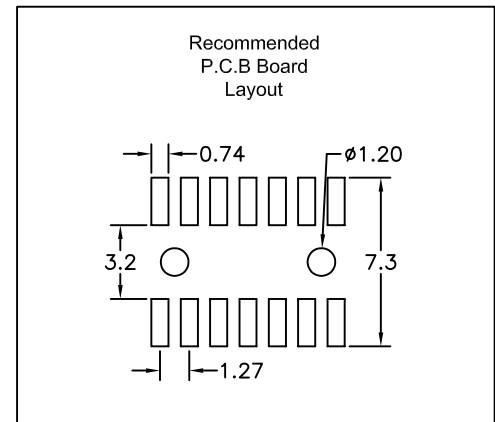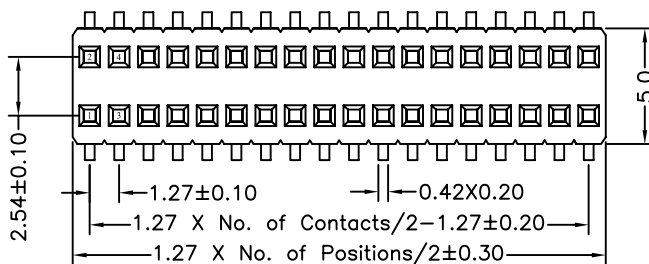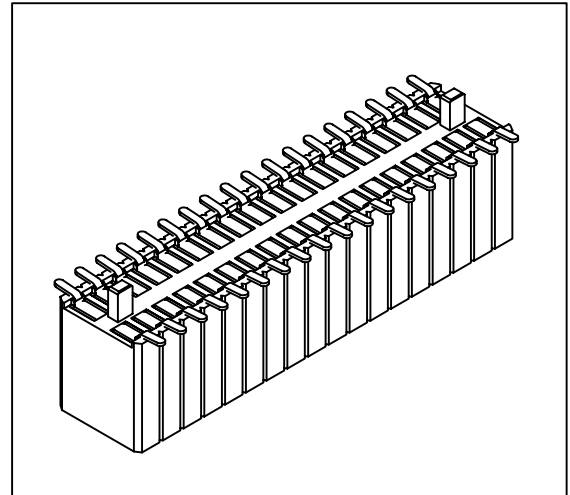

FED2570	-	U	XX	X	X	A	XX
No. of Positions 06 to 80		Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" E Au15μ" S Special		Insulator Material Option A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F BK-LCP S Special		Pin Length 01~99	