

Pitch:2.54*2.54mm(0.1"*0.1")

Pin Header Dual Row Right Angle Dip Type

QHB2XX Series

Technical Data

Material:

Contact material: Brass

Insulator material:Black polyester UL94V-0

Standard:PBT+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$






Withstanding voltage:550V AC/minute

Mechanical:

Operating temperatures: Gold plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +220° C,10s max.

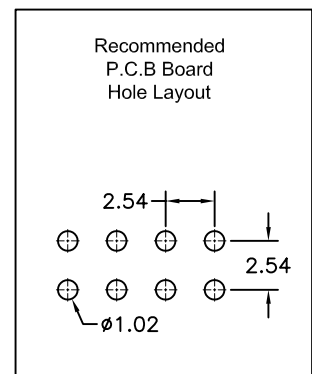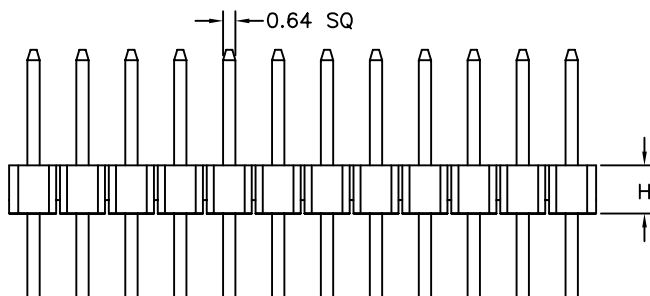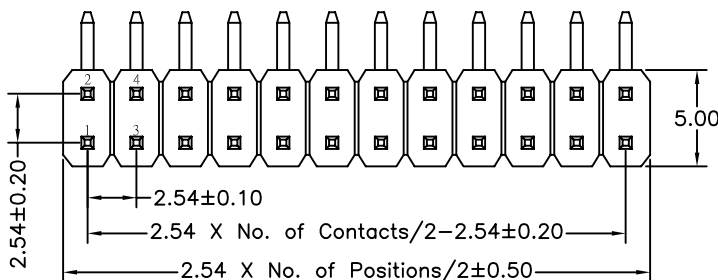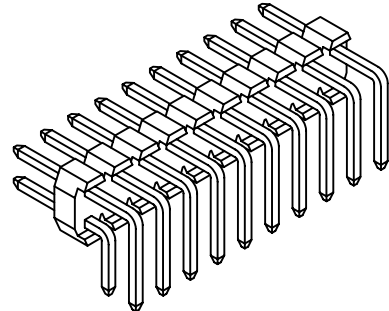

QHB2	XX	1 - P	XX	X	X	A	XX
High Option		No. of Positions		Plating Option		Insulator Material Option	
15	H=1.5mm	04 to 80		A	G/F	A	BK-PBT
17	H=1.7mm			B	Au3μ"	B	BK-PA66
20	H=2.0mm			C	Au5μ"	C	BK-PA6T
25	H=2.5mm			D	Au10μ"	D	BK-PA46
				E	Au15μ"	F	BK-LCP
				S	Special	S	Special
						Pin Length (A/B/D)	
						01~99	