

Pitch: 2.54*2.54mm (0.1"*0.1")

Box Header Right Angle Dip Type

BHBXX Series

Technical Data

Material:

Contact material: Brass

Insulator material: Black polyester UL94V-0

Standard: PBT+30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$






Withstanding voltage: 550V AC/minute

Mechanical:

Operating temperatures: Gold plated: -55°C to $+105^{\circ}\text{C}$

Tin plated: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+220^{\circ}\text{C}$, 10s max.

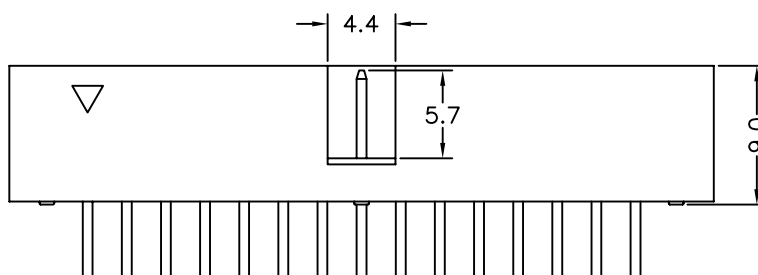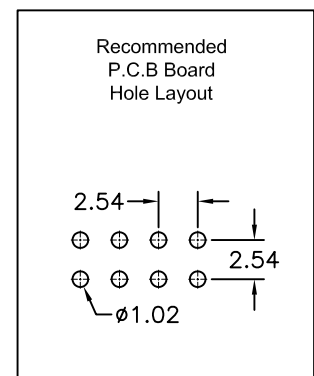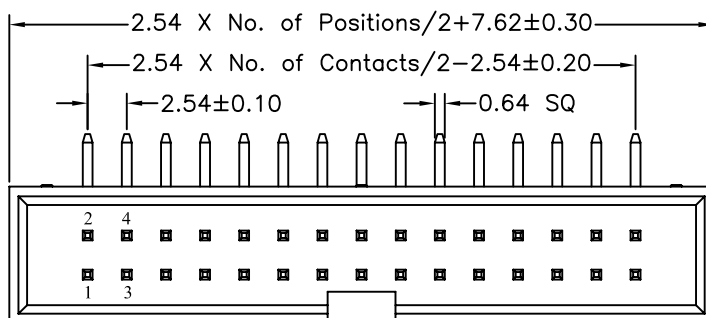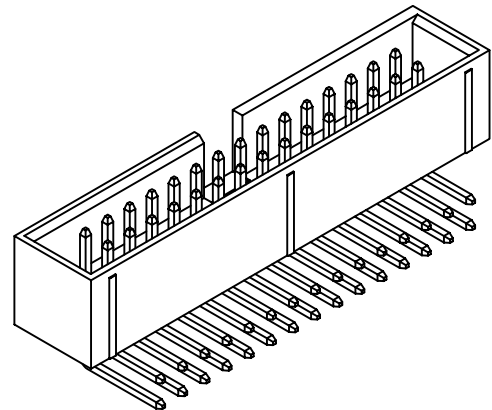

BHB	XX	-	X	X	A	XX
No. of Positions 06 to 64			Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" E Au15μ" S Special	Insulator Material Option A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F BK-LCP S Special		Pin Length 01~99