

Pitch: 1.27*1.27mm(0.05"*0.05")

Box Header Straight Dip Type

BEAXX-XXA Series

Technical Data

Material:

Contact Material: Brass

Insulator Material: Black Polyester UL94V-0

Standard: PA6T+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$






Withstanding Voltage: 300V AC/minute

Mechanical:

Operating temperatures: Gold Plated: $-55^{\circ}\text{C}\sim+105^{\circ}\text{C}$

Tin plated: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$

Soldering temperature: $+260^{\circ}\text{C}$, 10s max.

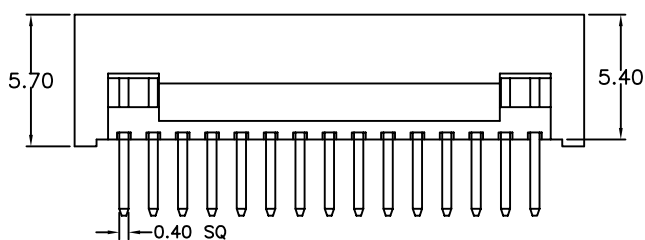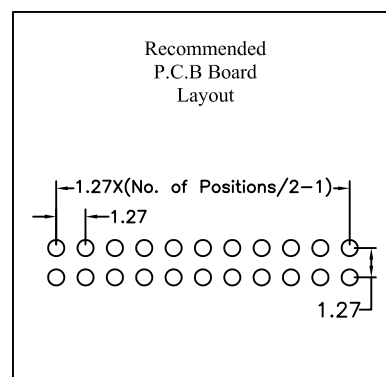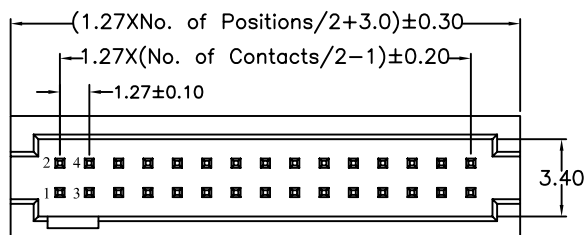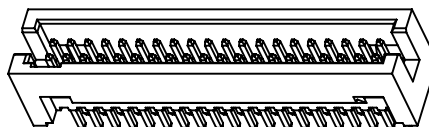

BEA	XX	-	X	X	A	XX
No. of Positions 04~64		Plating Option A G/F B Au3 μ " C Au5 μ " D Au10 μ " H GF/Sn120 μ " S Sn120 μ " Z Special		Insulator Material Option A BK-PBT C BK-PA6T D BK-PA46 F BK-LCP S Special		Serial No. 01~99