

Sockets for Plastic Leaded Chip Carriers(PLCC)

Solder tail

Series: PLD

Series PLD PLCC sockets,solder tail,with precision stamped contacts provding component retention thanks to positive spring action

Technical Specs:

Insulator:	Glass filled thermoplastic PPS-GF30-FR
Flammability:	UL 94V-0
Contact :	phosphor bronze
Contact pressure:	Min. 1.5 N per contact
Mechanical life:	Min. 50 cycles
Rated cument:	2 A
Contact resistance:	Max. 20 mΩ
Dielectric strength:	Min. 600 V _{RMS}
Insertion resistance:	Min. 5000 MΩ
Capacitance:	Max. 2pF




Ordering information

PLD - NN - A C P A

No. of Positions

Body colour code
1 Black
2 Brown

Clip Plating code
1 Tin150μ"
2 Tin200μ"
3 GF
4 Gold2μ"
5 Gold3μ"
6 Gold10μ"
7 Gold15μ"
S Special

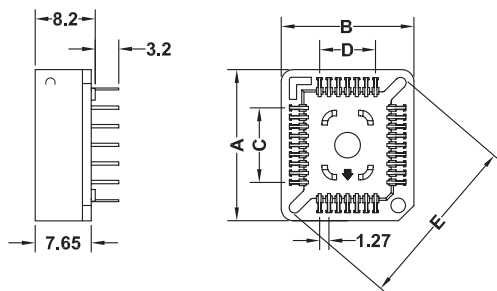

No. of poles	A/B	C/D	E	Order Codes
20	14.98	5.08	16.88	PLD-20-ACPA
28	18.10	7.62	20.45	PLD-28-ACPA
32	20.60/ 18.10	10.16/ 7.62	22.20	PLD-32-ACPA
44	23.20	12.70	27.20	PLD-44-ACPA
52	25.80	15.24	30.80	PLD-52-ACPA
68	30.80	20.32	37.30	PLD-68-ACPA
84	35.90	25.40	44.50	PLD-84-ACPA

PCB hole patterns Series PLD, thru-hole types

